

Dr. Maxim Puchkov <sup>1</sup>  
Prof. Dr. Hans Leuenberger <sup>1,2</sup>

CINCAP LLC, center for innovation in computer-aided pharmaceuticals<sup>1</sup>  
c/o Ifiip llc, Institute for innovation in industrial pharmacy<sup>2</sup>

Basel,  
Switzerland

# Virtual training tools – a video game or more?

Virtual Equipment Simulators (VES) in pharmaceutical production – a novel tool for continuous education and personnel training


# FDA Whitepaper March 2004

## Three Dimensions of the Critical Path

<b>Assessing Safety</b>	Show that product is adequately safe for each stage of development	<ul style="list-style-type: none"> <li>• Preclinical: product safe enough for early human testing Eliminate products with safety problems early</li> <li>• Clinical: show that product is safe enough for commercial distribution</li> </ul>
<b>Demonstrating Medical Utility</b>	Show that the product benefits people	<ul style="list-style-type: none"> <li>• Preclinical: Select appropriate design (devices) or candidate (drugs) with high probability of effectiveness</li> <li>• Clinical: Show effectiveness in people</li> </ul>
<b>Industrialization</b>	Go from lab concept or prototype to manufacturable product	<ul style="list-style-type: none"> <li>• Design a high-quality product               <ul style="list-style-type: none"> <li>- Physical design/Characterization/Specifications</li> </ul> </li> <li>• Develop mass production capacity               <ul style="list-style-type: none"> <li>- Manufacturing scale-up/Quality control</li> </ul> </li> </ul>

# FDA Whitepaper March 2004

## Three Dimensions of the Critical Path

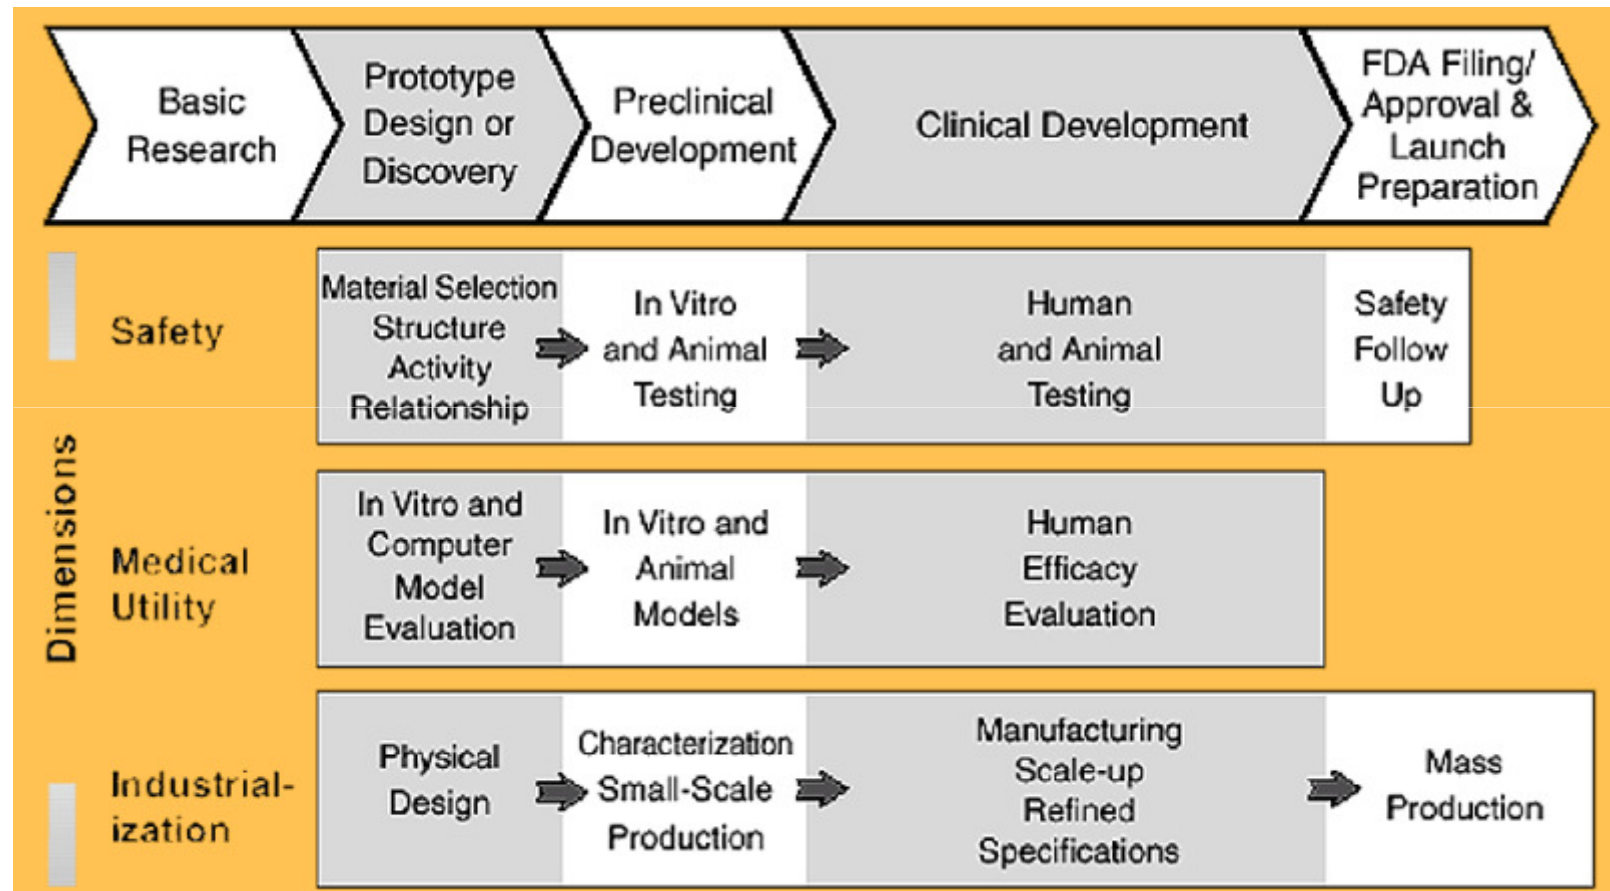

# The SIGMA Concept I

## **FDA pushes forward the PAT Initiative for very good reasons:**

- The variability of most pharmaceutical processes needs to be reduced.
- The performance of a process can be described by its Sigma value.

# The SIGMA Concept II

- The champion is the chip industry with a six Sigma manufacturing performance (**static values**)
  - i.e. with an amount of defective samples  $\leq 2$  ppb.
- The performance of the pharmaceutical industry is around 2 Sigma ( $\leq 4.6$  % defectives).

## Faster Time to Market: Dosage Form Development!

- The development of a dosage form from production of the first formulation in the preclinical research up to registration of the commercial form is very costly and lasts between 8 to 12 years.
- To reduce time to market it is important to think about an integrated approach and a better connectivity between pharma R&D and manufacturing.


## Poor Connectivity:

*"... Companies tend to **operate in silos** – R&D, manufacturing, marketing. This is a very proprietary culture. Knowledge and information sharing is the basis to overcome inefficiencies ..."*

John Moore, Analyst

**Source:** Catching up with Reengineering June 2, 2003  
Chemical & Engineering News, Vol. 81, N° 22

# Improved connectivity: Co-Development Strategy

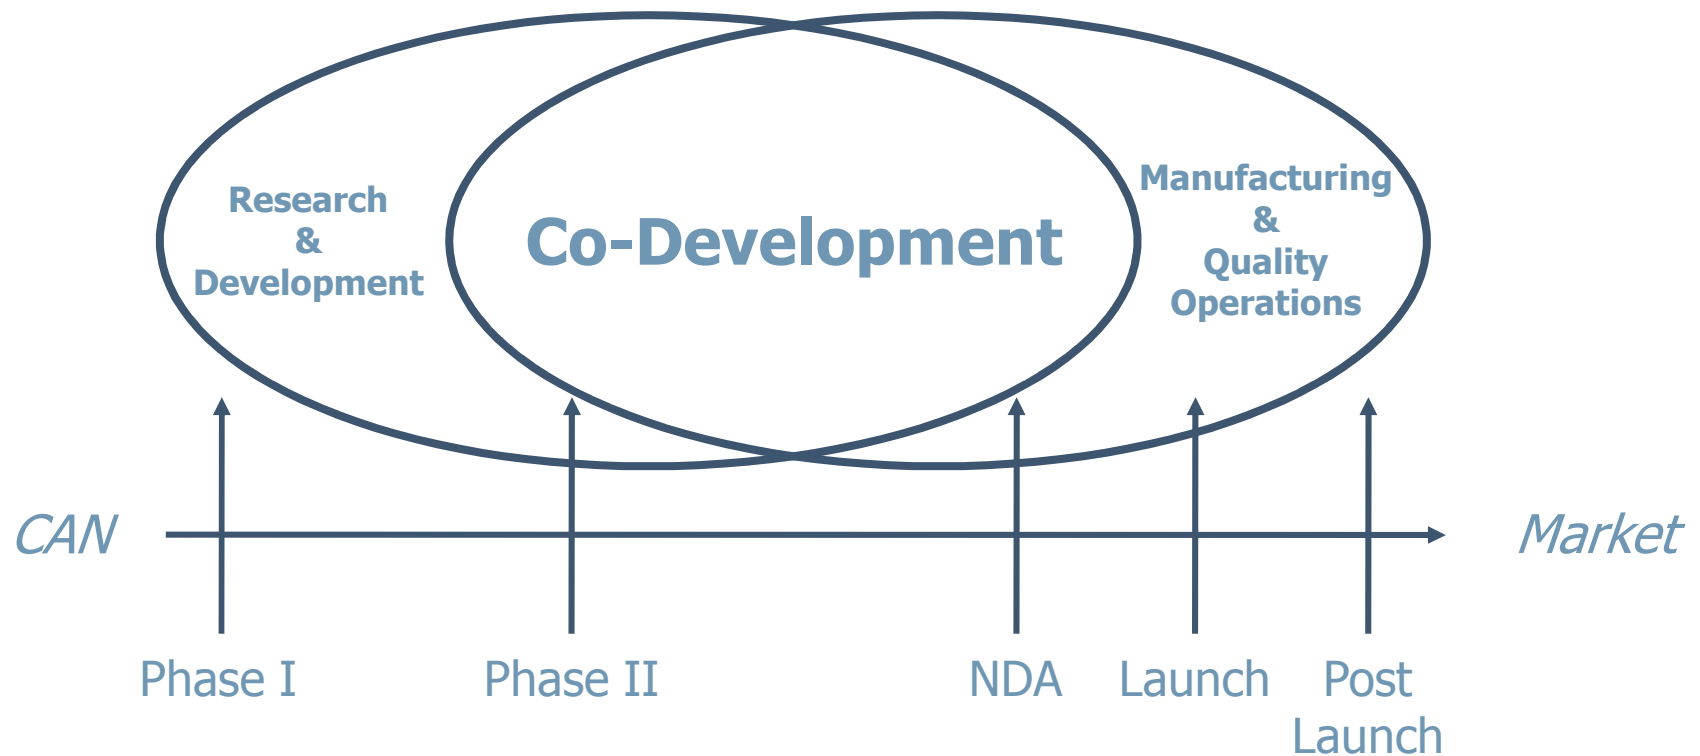

Courtesy of J.Werani (Pfizer)



## Rationale: design of quality + reduce human errors

- Need for robust formulation and process design
  - Formulation screening is costly and time consuming
  - Non-robust formulation will jeopardise full-scale production
- Need for mechanistic models and expert systems
- Need to reduce possibility of **human error**
  - Batch-wise production is an „agar plate“ for growth and flourish of manufacturing failures
  - Floor operators skill assessment and continuous education

# Knowledge pyramid

## Product and Process Quality Knowledge: Science-Risk Based cGMP's

**Quality by Design**  
**Process Design**


**GMP/CMC FOCUS**  
**Design qualification**

***Yes, Limited to the  
Experimental  
Design Space***

***Focused; Critical  
Process Control  
Points (PAT)***

***Maybe,  
Difficult to  
Assess***

***Extensive;  
Every  
Step  
(CURRENT)***

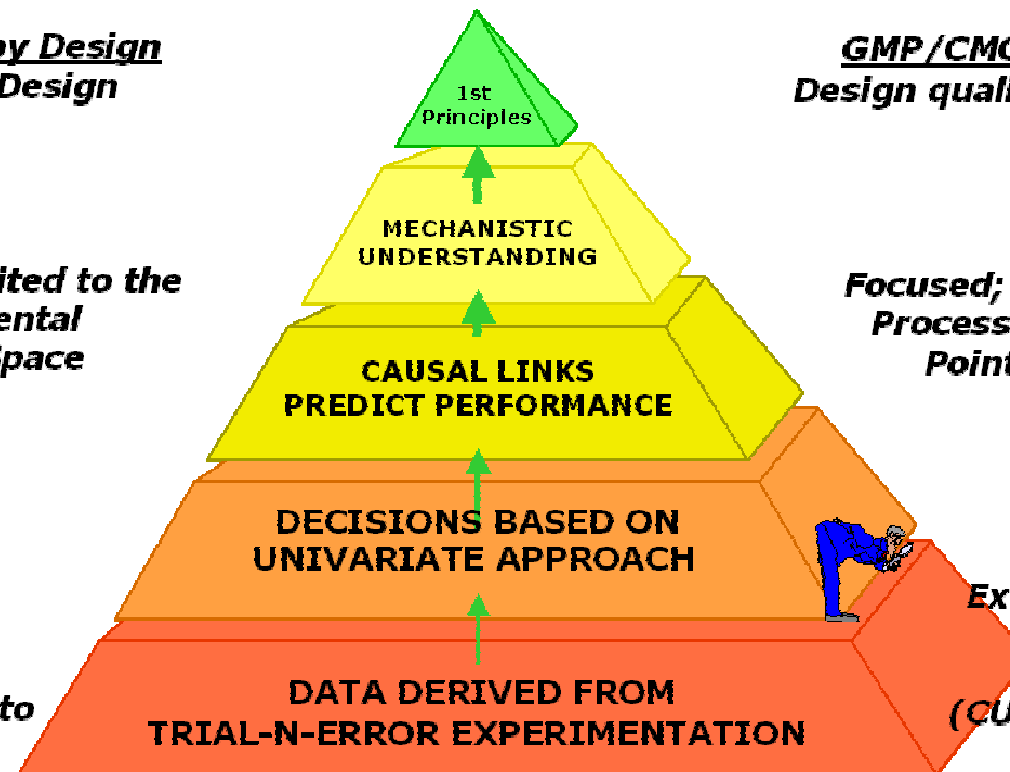

Courtesy of FDA (A.Hussain)

# Co-Development Toolbox


## Co-Development



# Example: granule size and tablet disintegration



Prediction of the optimum amount of disintegrant to minimize the disintegration time (use of expert system CINCAP):

- based on percolation theory and cellular automata
- mathematical description based only on geometrical and physical considerations independent on chemical properties of compounds!

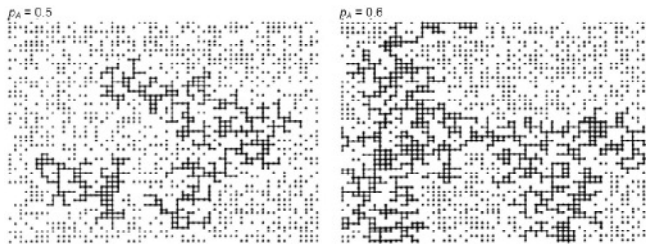



Two cases of water penetration into a tablet as a factor of particles size:

Case1:  $r \leq (\sqrt{3}-1) \times R$




$$\chi_{dis} = \left( \frac{p_s^{rcp}}{1 - \epsilon} - \epsilon \right) \times 100$$

Case2:  $r > (\sqrt{3}-1) \times R$




$$\chi_{dis} = \left( \frac{p_s^{rcp}}{1 - \epsilon} \right) \times 100$$


# Cellular automata enable to model natural phenomena

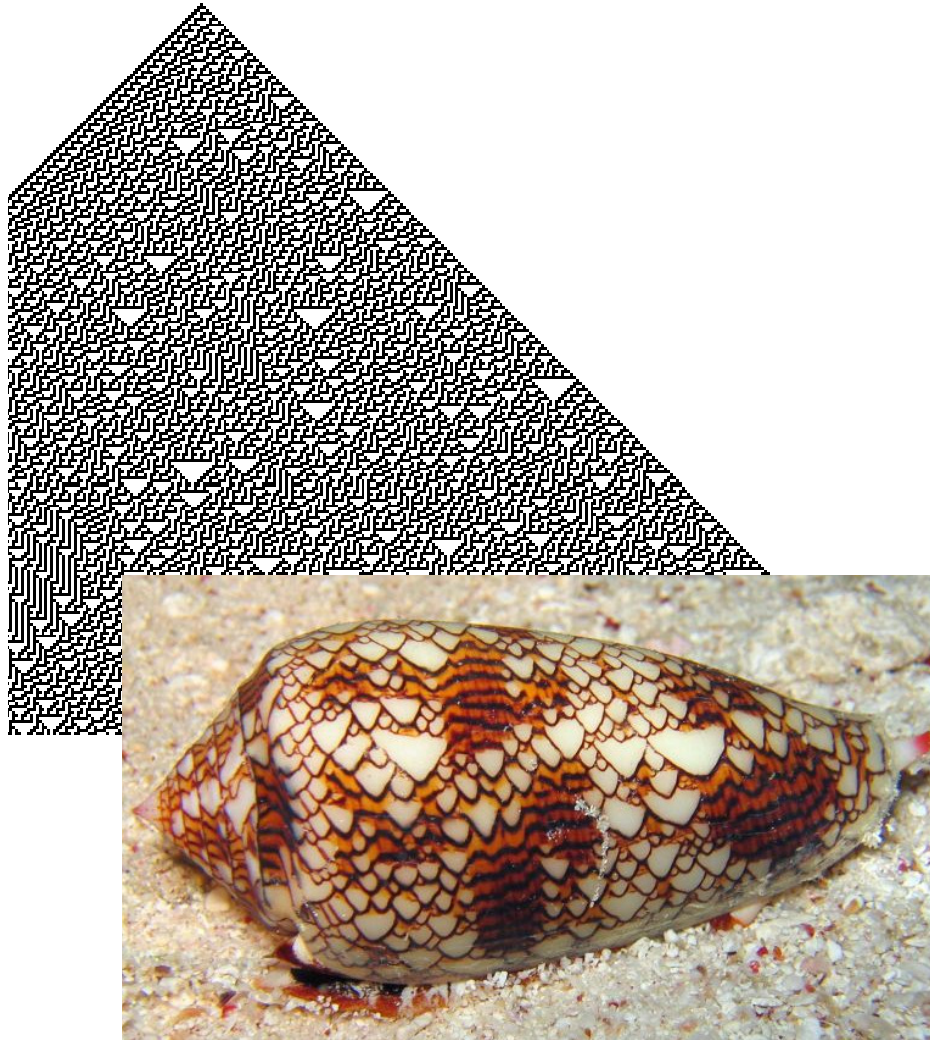





[www.directopedia.org](http://www.directopedia.org)



Belousov-Zhabotinski Reaction

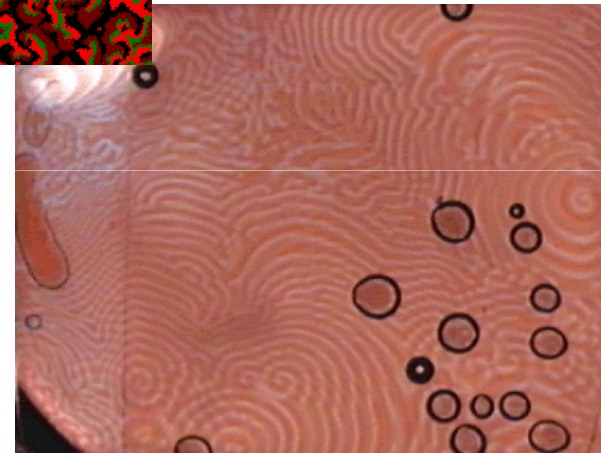

# Formulation Design Studio: Expert System CINCAP

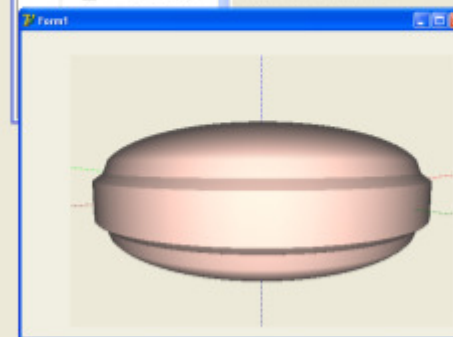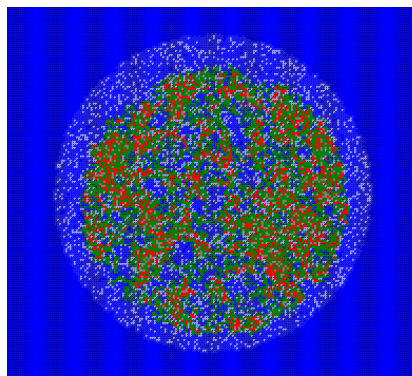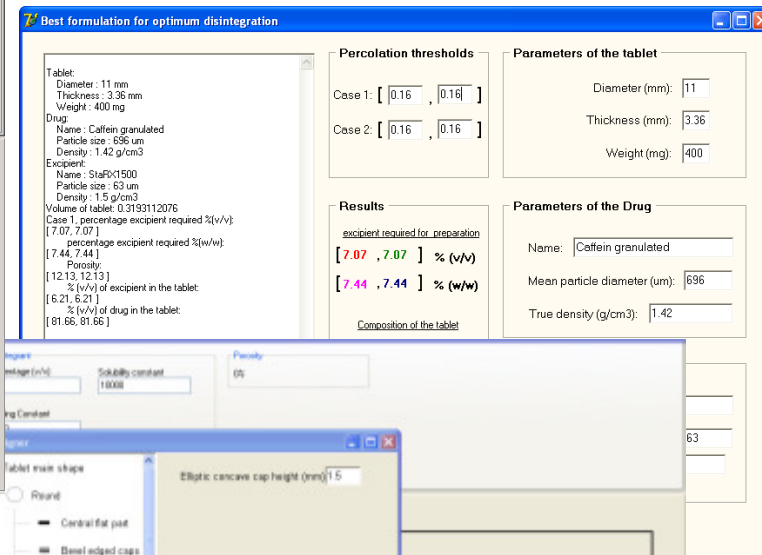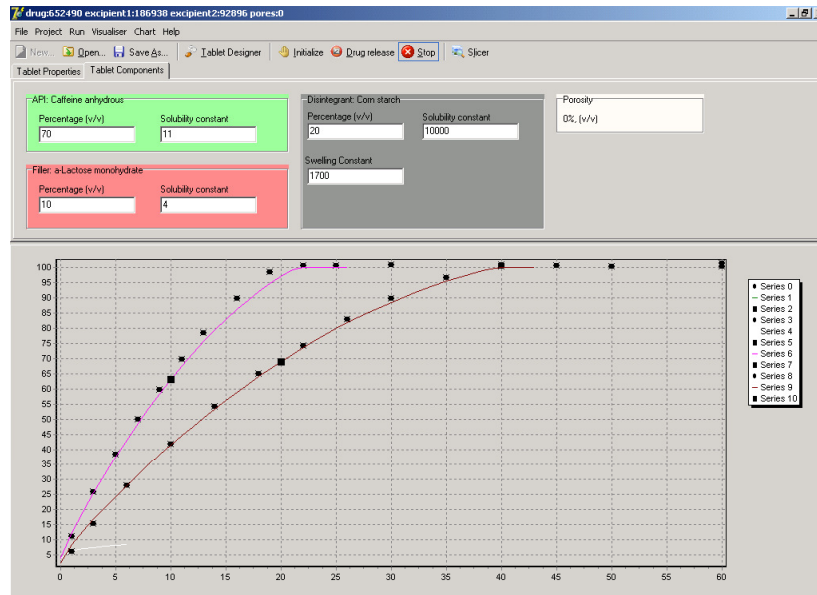

# Co-Development Toolbox

Virtual Equipment Simulators (VES) in order to reduce human failures

- What do you do for a continuous training and education of your production floor operators in order to improve process quality?
- What happens when you start to use new equipment?
- What do you do if your collaborators feel bored and /or frustrated using the operation manual?
- How to train your personnel to correctly respond to critical situations without putting at risk the quality of your product?
- How to fulfill the requirements of continuous education as requested by authorities such as FDA, etc?



# What are VES?


- Technically speaking, simulation is modeling process's behavior, form and visual appearance.
- "... like a flight simulator?"
- **Comparable to the effectiveness of flight simulator to pilot training!**



# Simulator vs. interactive animation

- Interactive animation → just reproducing visual appearance.
- Simulation → wider range of possible situations, allowing prediction and exploratory learning.
- Need: strong mechanistic model model for an optimal VES
- CINCAP VES → Beyond interactive animation

# Look&Feel (example MiniGLATT)

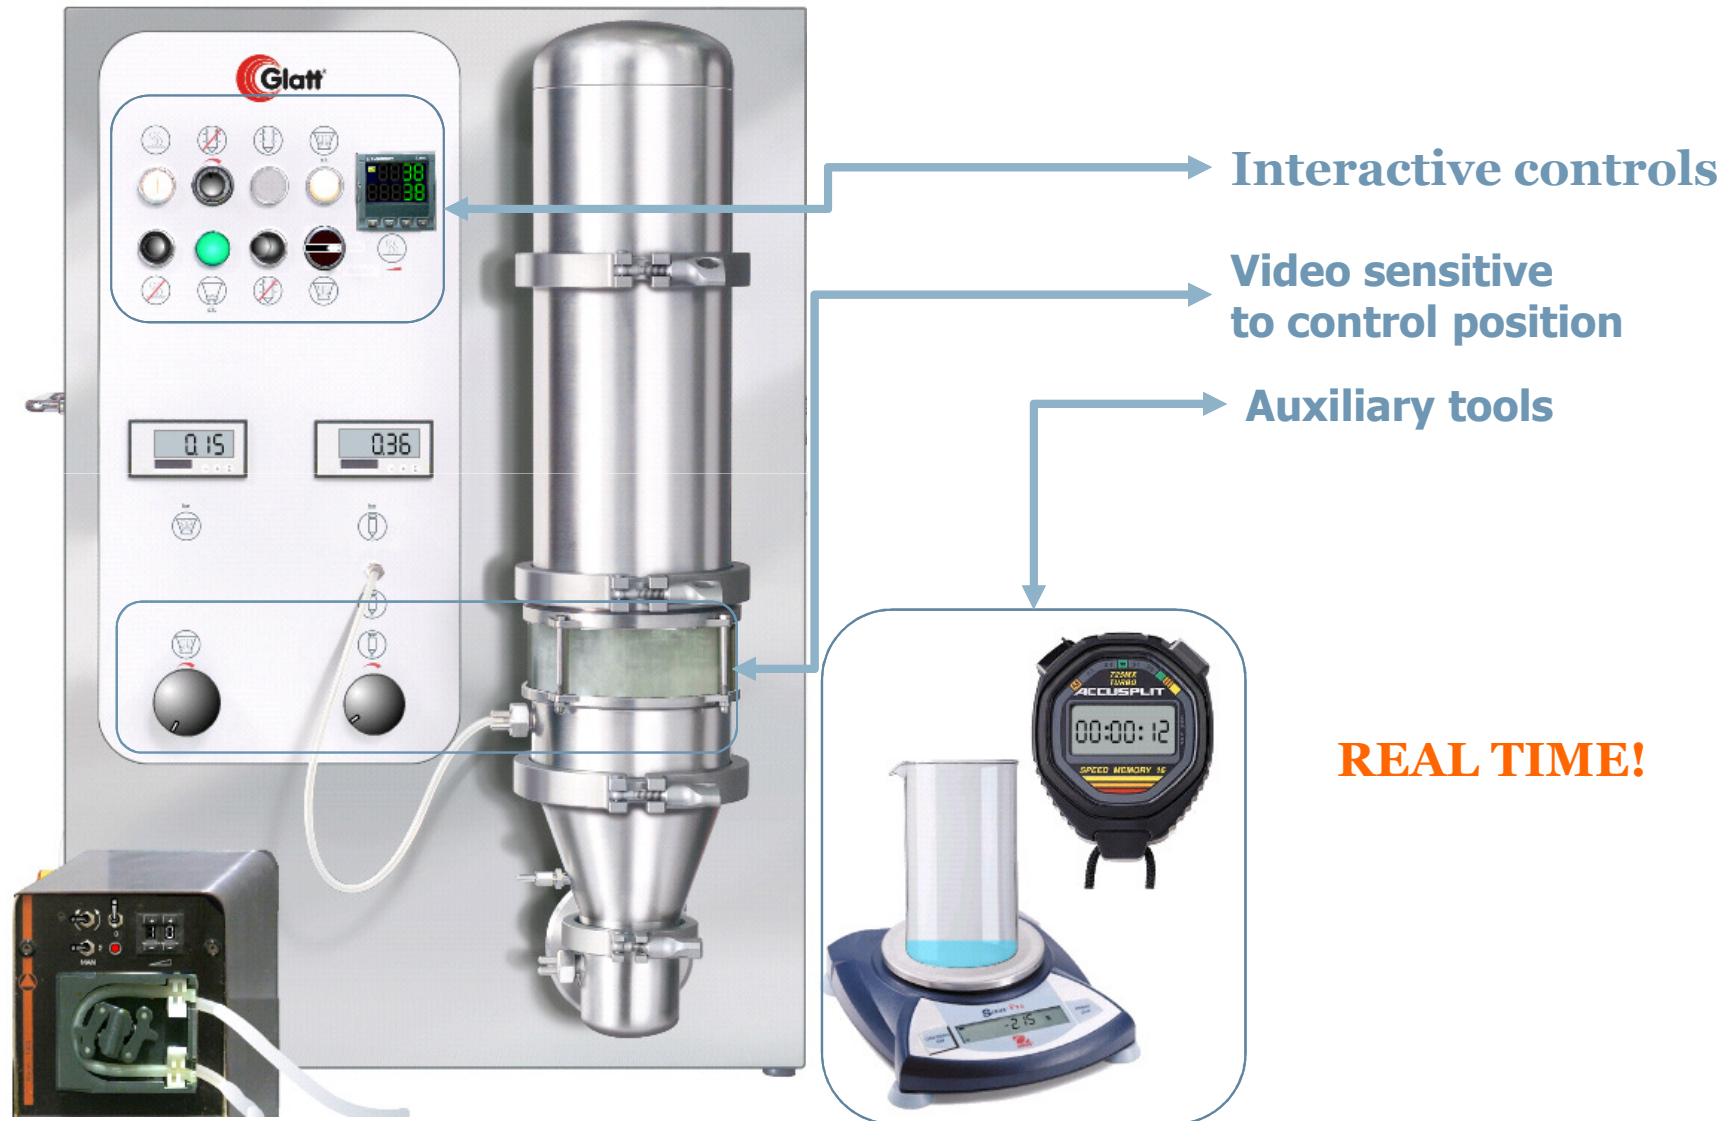

# Virtual Equipment Simulators (VES)


- VES is an ideal tool to get a better process understanding (Process Analytical Technology);
- VES is an ideal tool to explore the limits of the process without putting to danger operators and product;
- VES is an ideal tool for training especially to reduce human errors during real operation;

# VES and PAT



- Need: High-quality equipment simulator which is BASED on process understanding → PAT.
- Need: incorporating mechanistic models which describe correctly the process itself.
- This type of VES is directly linked to a science-based expert system.

# Science-based VES (e.g. fluid-bed granulator)

- Simple but effective

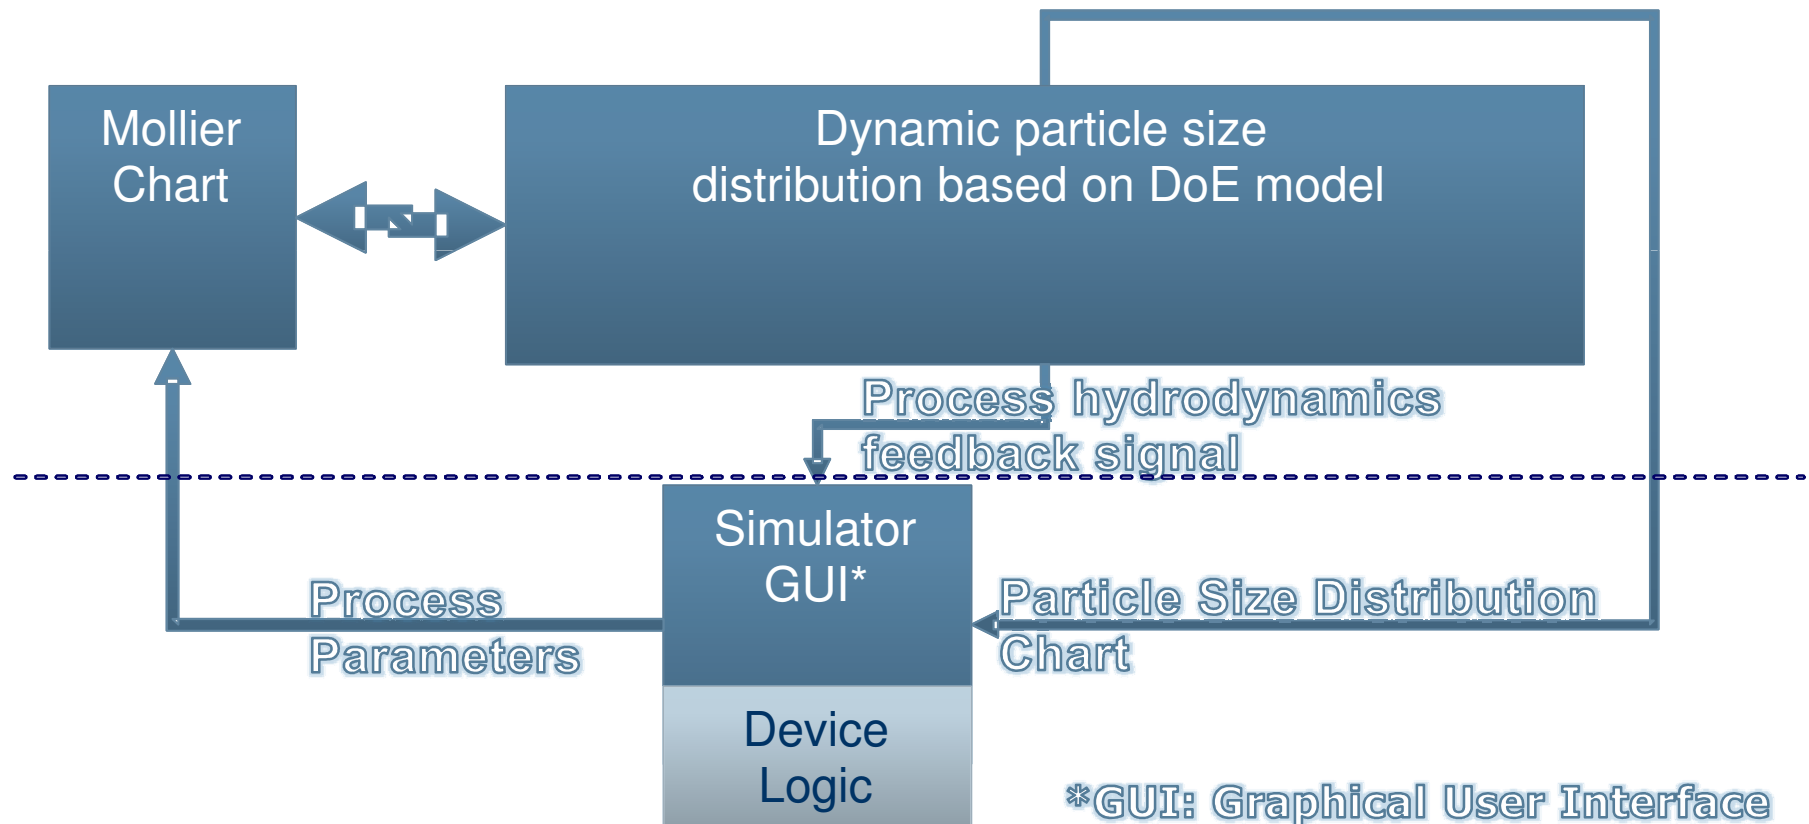

# Mollier chart/ backbone of VES

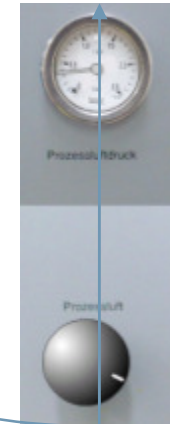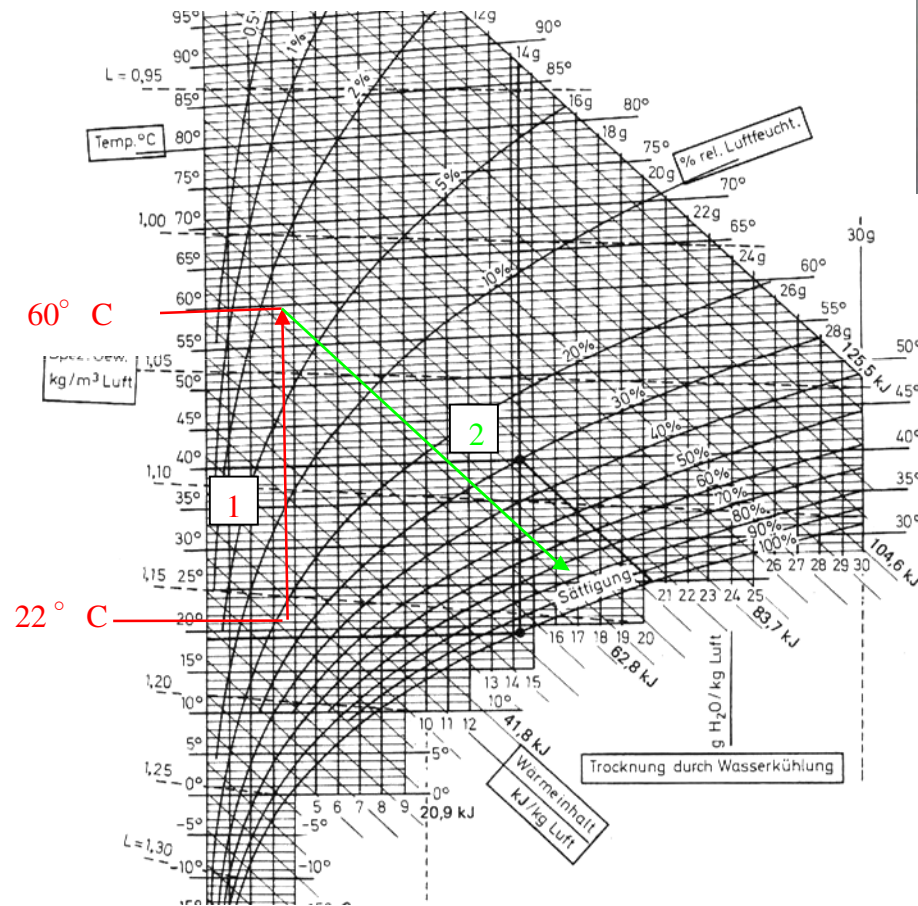

# Real-time simulations: modelling possibilities

- Balances → yes
- Response Surface Methodology: → yes
- Micro level modelling: → difficult, almost no.



# Virtual Case-study: Granulation





## Case Study: example task definition for a trainee

- Trainee must granulate starting powder mix (140  $\mu\text{m}$ .) to obtain mean granule size of ca. 300 $\mu\text{m}$ . This mean granule size distribution is achieved if binder concentration (PVP) has reached ca. 4% (w/w) in the formulation. Binder solution concentration: 5% (w/w)
- Task for the trainee: pump calibration; estimation of residence time; calculating amount of binder required; study the fluidization regimes; calculate required drying time; proper response to a given critical situation (e.g. air conditioning failure)
- Given process constants etc:
  - Air source: 20%RH, 25°C
  - Assumed exhaust air saturation is constant: 85% (can be changed)
  - Establish pressure (bar) to air throughput ( $\text{m}^3/\text{h}$ ) calibration curve

# Task: pump calibration



# Tasks contd.

- Process parameters calculation
  - Mollier chart → water removal capacity of process air, product temperature
  - heat and mass balance → pumping rate, residence time, drying time
  - Select spray pressure from support resources
- Start experiment
  - Be aware to set 0.5bar spray pressure prior to start fluidization (prevents clogging of a nozzle)
  - Check the dynamics of particles growth

# Task: critical situation

- It is possible to switch on the in-built generator of a critical situation
- Typical critical situations:
  - Air conditioning failure
  - Pump failure
  - Sudden clogging of filters
  - Temperature sensor failure
- Trainee must properly react to a failure and try to continue operation if possible.

# Task: Drying and Reporting

- When product has reached required particle size distribution → switch to drying (stop pumping)
- Continue drying until required product residual moisture content.
- Stop the process by turning the process knob to “off” position.
- Report will be printed
  - Report includes a complete record of all events and user interactions during process
  - There is a possibility to “play back” the recorded process

## Task: use VES to optimize process

- Using acquired knowledge trainee can repeat experiment with optimized conditions
  - Shorter residence time
  - Lowering energy consumption
  - Optimized conditions for thermo-labile products

## VES in training and what advantages it gives

“Simulation is a learning experience in which a learner performs a meaningful task in a specific context, receives consequential feedback, and has access to support resources”

Daniel Bielenberg (Accenture),  
TechLearn, 2001

Building simulations without careful consideration of the learning experience is folly.



# VES advantages

- Personnel training
  - Possibility of real personalized individual training
  - Identifying weaknesses and improving operator's skills
  - Testing existing SOPs and developing new SOPs
  - Testing formulation robustness **on large equipment!**
- Business perspective
  - Reducing human errors
  - Better process understanding leading to a higher quality
  - Facilitated troubleshooting with equipment vendor
- Business perspective (equipment manufacturers)
  - Try it virtually but buy it in a reality (formulation suitability check)
  - Reduce travel and logistical expenses
  - Improved customer satisfaction and better overall experience with the device



# Under construction

- Virtual reality
  - Clean rooms
  - 3D versions of machinery (tablet presses, etc.)

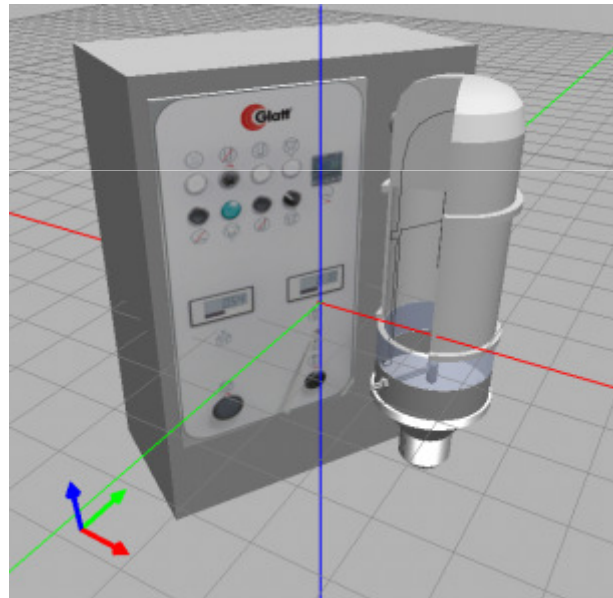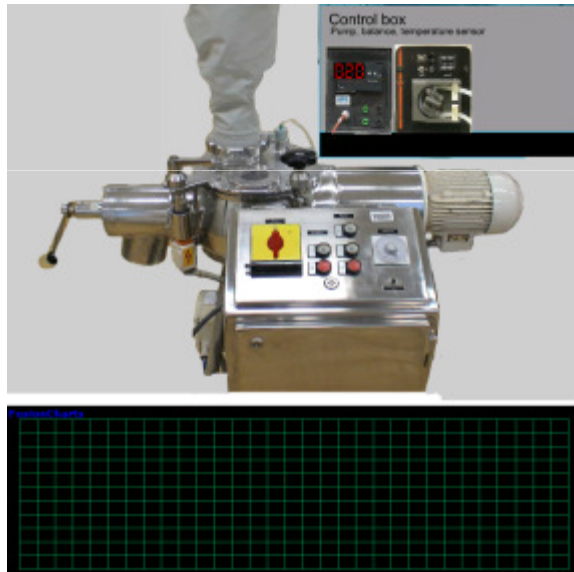



Audience Q&A

Thank you for your attention!